

SILK
PLASTER®

MICROCEMENT

CEMENT LOOK
ALLOVER WATERPROOF

3D SYSTEM:
FLOOR, WALLS AND CEILING



Eco Friendly Coatings Inspired by Nordic Nature

THE SP MICROCEMENT 3D SYSTEM

Is a single-component solution designed exclusively for interior surfaces, providing highly durable coatings for floors, ceilings, and walls.

In most of the cases Microcement is used in bathrooms replacing old fashioned tiles. It is durable, water and wear resistant covering which can be used in residential, commercial, and wellness areas.



ECO-FRIENDLY



WASHABLE



HIGH-COVERAGE



LOW-VOC



ODORLESS

CREATIVE SEAMLESS FINISHES

READY TO USE

2-4 mm THICK

3 SINGLE - COMPONENT PRODUCTS

EASY TROWEL APPLICATION

POSSIBILITY TO CUSTOMISE EFFECTS AND COLOURS

3 WATER-BASED PRODUCTS

SP BASE MICROCEMENTO

Basecoat

SP FINISH MICROCEMENTO

Finish coating

PU VARNISH TOP888

Special PU &
Water-repellent
protective topcoat

BENEFITS



High
Adhesion



Scratch
resistance



Ready to Use



Can be tinted
in any colors



No demolition
costs



Stain
resistance




Impact
resistance



Indoor air
quality A+



SP BASE MICROCEMENTO

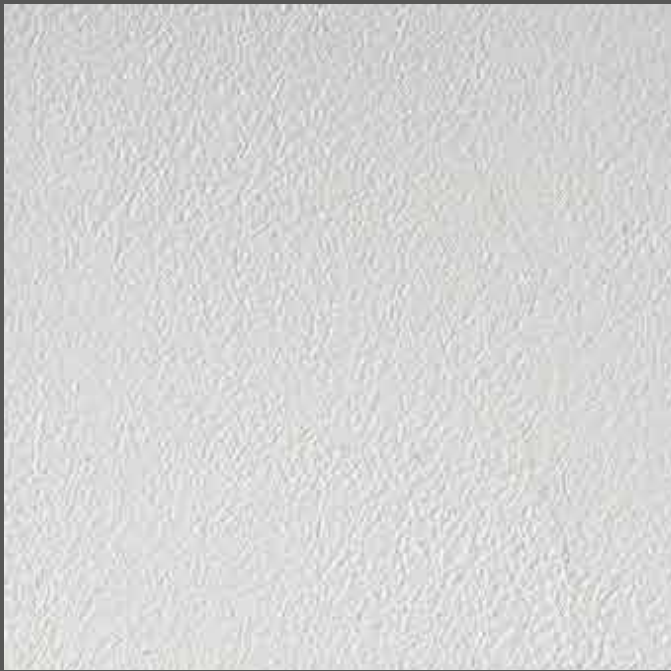


SP FINISH MICROCEMENTO



SP FINISH MICROCEMENTO 1



SP FINISH MICROCEMENTO 2

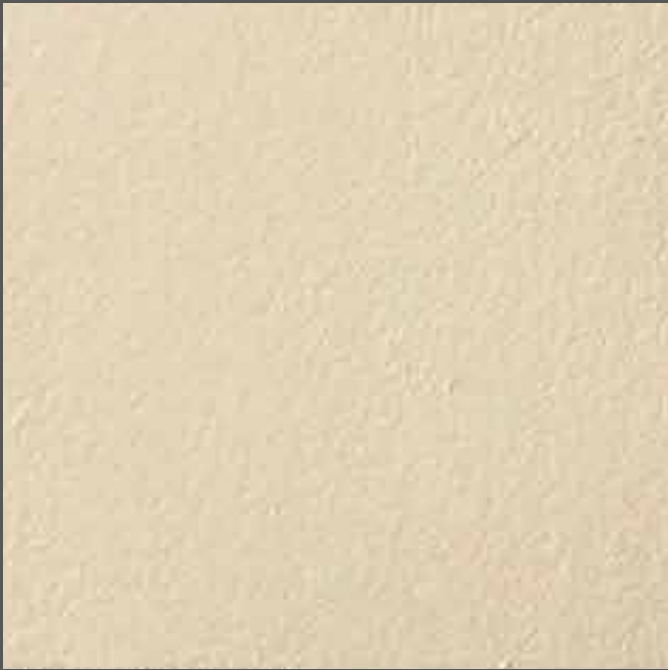

SP FINISH MICROCEMENTO 3



SP FINISH MICROCEMENTO 4

FEATURES

Correct application allows to obtain very resistant surface in few steps, furthermore it is easy to clean. The system can be applied directly to the most common surfaces (tiles, concrete, gypsum plasterboard and cement plaster) without costly and time-consuming preparation of substrates. It can be applied in areas such as living rooms, kitchens, bathrooms, halls and staircases, GYMs and even on furniture. It is also an interesting solution for kitchen splashback decoration.

The surface of Microcemento can be influenced by the movements of a decorative trowel. The way the trowel is applied during the installation process can create a variety of textures and patterns, allowing for artistic expression. These trowel movements can produce effects such as smooth, marble-like surfaces, or more textured, rustic appearances. The skill and technique of the applicator play a major role in achieving the desired look.

SP BASE MICROCEMENTO

TECHNICAL DATA

TOOLS	stainless steel trowel
YIELD	0.9 - 1.1 kg/m ² per coat
LAYERS	1-2
DILUTION	ready to use

SP BASE MICROCEMENTO is a base layer of Microcemento system, usually this layer is not tinted, it has rough texture and is already water-resistant. Suitable for horizontal and vertical indoor surfaces, it ensures excellent adhesion to substrates like concrete, old resin floors and tiles.

SP FINISH MICROCEMENTO

TECHNICAL DATA

TOOLS	stainless steel spatula
YIELD	0.9 - 1.1 kg/m ² per coat
LAYERS	1-2
DILUTION	ready to use

SP Finish MICROCEMENTO is a mid layer of the system what must be applied on SP BASE MICROCEMENTO. It has smooth texture and gives the surface a finished look.


PU VARNISH TOP888

TECHNICAL DATA

TOOLS	roller, brush, spray
YIELD	7-8 m ² /l in 2 coats
LAYERS	2-3
DILUTION	ready to use

PU VARNISH TOP888 - top layer of the system. Excellent water-repellent, transparent polyurethane (PU) protective coating. It performs a semi-matte finish and guarantees water and wear resistance.

APPLICATION

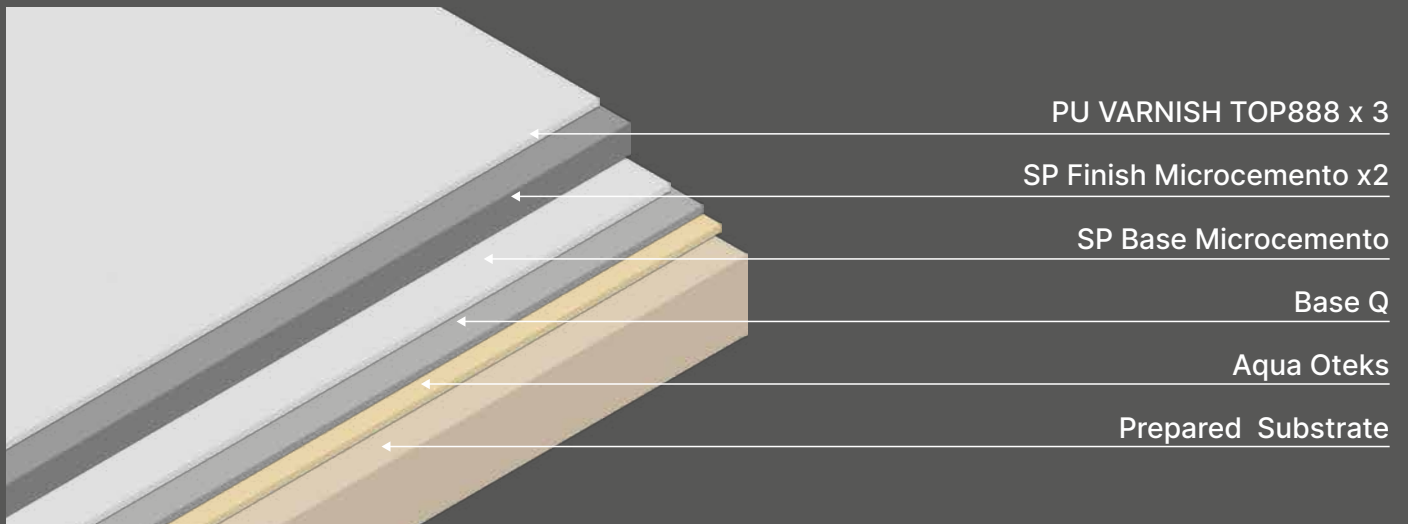

Application of Microcemento system is easy if you follow provided instructions.

- If Microcemento is applied directly on tiles special Aqua Oteks primer must be used. If not, you can proceed immediately with applying the first layer - primer Base Q.
- SP Base Microcemento is a base layer and usually not tinted, applied by venetian stainless steel trowel or putty knife in a 1 layer. In case of overlays sand it with p40-p60 grit.
- When the SP Base Microcemento layer is dry apply 2 layers SP Finish Microcemento. Finish layer is smooth and can be tinted.
- Drying time between all Microcemento layers is 1 day.
- Sand SP Finish Microcemento carefully with p320 sandpaper.
- Spread PU VARNISH TOP888 in 2-3 layers and use fine-grit sandpaper. In bathrooms 3 layers of PU VARNISH TOP888 must be applied.





SILK PLASTER
EU Factory & Warehouse
LV1055, Spilves 6,
Riga, Latvia

eu@silkplaster.eu
371 20777800

**SILK
PLASTER®**

silkplaster.eu